

# SUN Q

LED 350mA - 3,5W


**IT** Faretto da incasso - Realizzato in metallo con schermo in policarbonato.

**EN** Recessed spotlight - Metal structure and screen in polycarbonate.

**DE** Einbaustrahler - Metall-Gehäuse und Polykarbonat- Abdeckung.


118-140 lm/W PHOTOBIOLOGICAL CLASS 0 CRI=85

CE ENEC 05 IP20 PATENTED

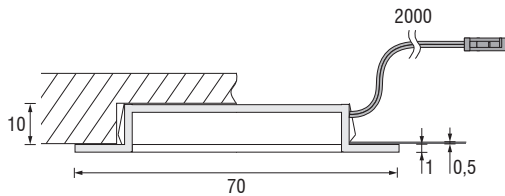


**A** Installazione su legno  
Fitting - Wooden Surfaces  
Montage - Holz

**B** Installazione su lamiera  
Fitting - Metal Surfaces  
Montage - Metall

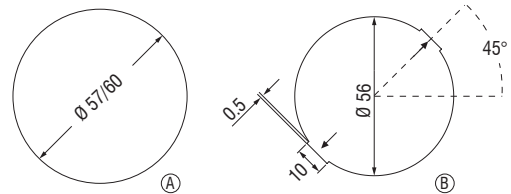

Foro di incasso / Recessed hole / Einbaumaße

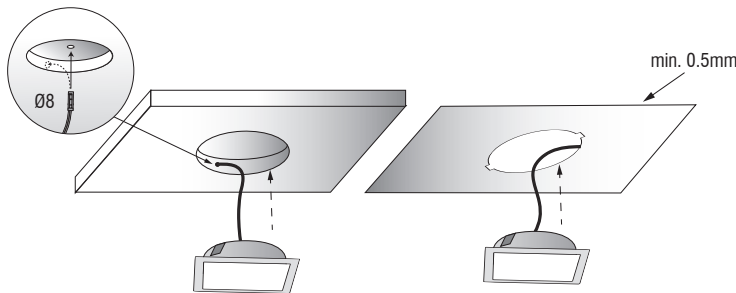

Finitura Finish - Ausführung	3000 K		4000 K		Imballo - Packaging - Verpackung		
	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
Acciaio / Steel / Edelstahl	1732020A	A++	1732120A	A++	1	0,085	25 x 75 x 100
Alluminio / Aluminium / Aluminium	1732020S	A++	1732120A	A++	1	0,085	25 x 75 x 100
Cromo / Chrome / Chrom	1732020C	A++	1732120A	A++	1	0,085	25 x 75 x 100
Bronzo / Bronze / Bronze	1732020L	A++	1732120A	A++	1	0,085	25 x 75 x 100
Oro / Gold / Gold	17320200	A++	1732120A	A++	1	0,085	25 x 75 x 100
Bianco / White / Weiß	1732020B	A++	1732120A	A++	1	0,085	25 x 75 x 100
Nero / Black / Schwarz	1732020N	A++	1732120A	A++	1	0,085	25 x 75 x 100

SUN Q LED 350mA - 3,5W		LUX
mm	Beam Angle	3000K 4000K
250	108°	1400 1600
500	Ø 2000	300 400
750	Ø 3100	150 120
1000	Ø 4100	70 100

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)  
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore  
Connector / Verbindungsstecker

