


391

40kg PORTATA
CARRYING CAPACITY

GUIDE SU RUOTE AD ESTRAZIONE PROGRESSIVA RUNNERS ON WHEELS WITH PROGRESSIVE EXTENSION



RUOTE IN ACCIAIO CON SFERE
BALL BEARING STEEL WHEELS

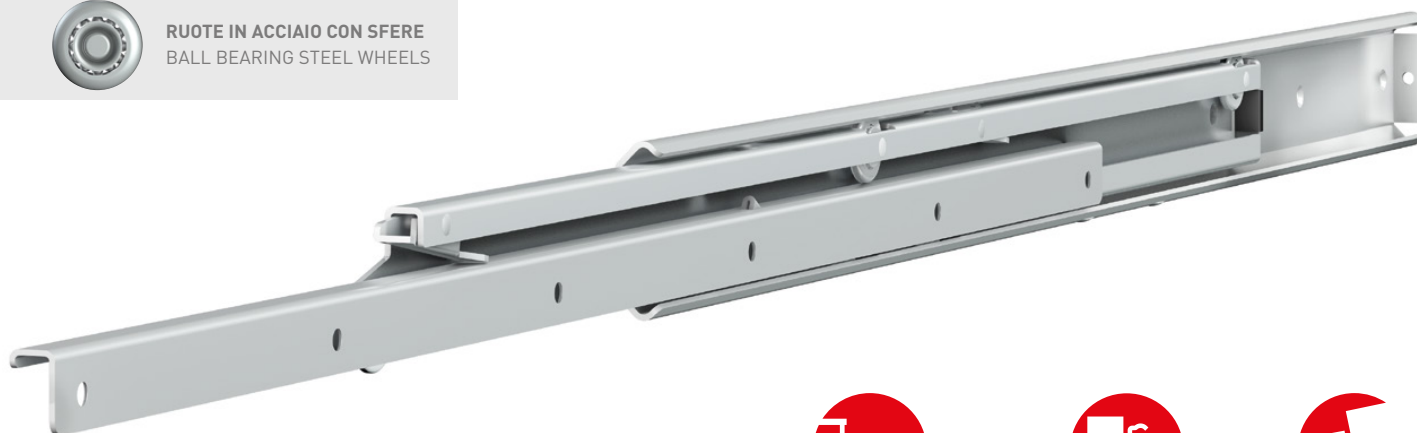

ESTRAZIONE TOTALE
FULL EXTENSION




FISSAGGIO LATERALE
SIDE MOUNTING



SGANCIABILE
REMOVABLE

ESEMPIO DI APPLICAZIONE / EXAMPLE OF APPLICATION

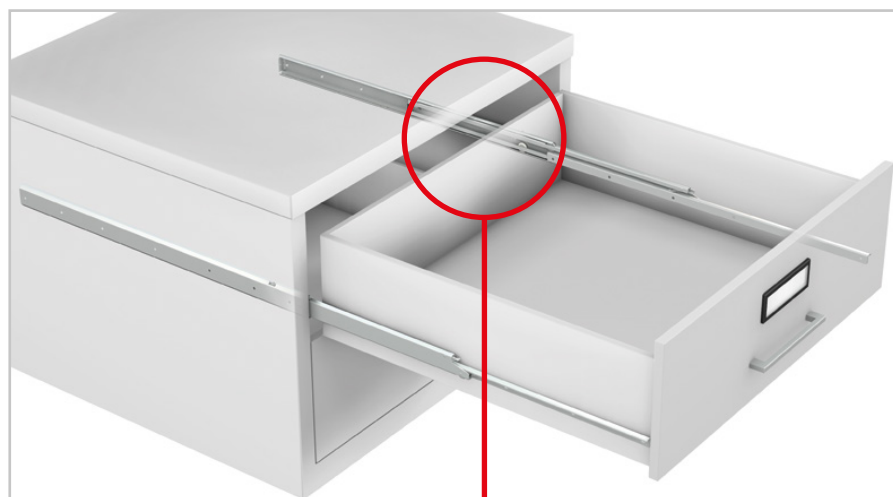

Portata massima kg 40.
La portata massima si riferisce al carico massimo consentito per coppia di guide (mm 550).
Fissaggio laterale.
Scorrimento dei profili guida ad azione progressiva.
Fermo in uscita con levetta di sgancio per estrazione orizzontale del cassetto.

Carrying capacity kg 40.
The carrying capacity is referred to the maximum load for a pair of slides (mm 550).
Side mounting.
Runner sliding with progressive action.
Catch with release lever to pull the drawer out horizontally.

A / B / C


Ruote in acciaio con cuscinetto a sfere.
Ball bearing steel wheels.


D

Per lunghezze da 300 a 600 mm ruote oscillanti in **delrin**.
Per lunghezze da 650 a 800 mm ruote oscillanti in **acciaio**.

Lengths from 300 to 600 mm fluctuating **delrin** wheels.


Lengths from 650 to 800 mm fluctuating **steel** wheels.

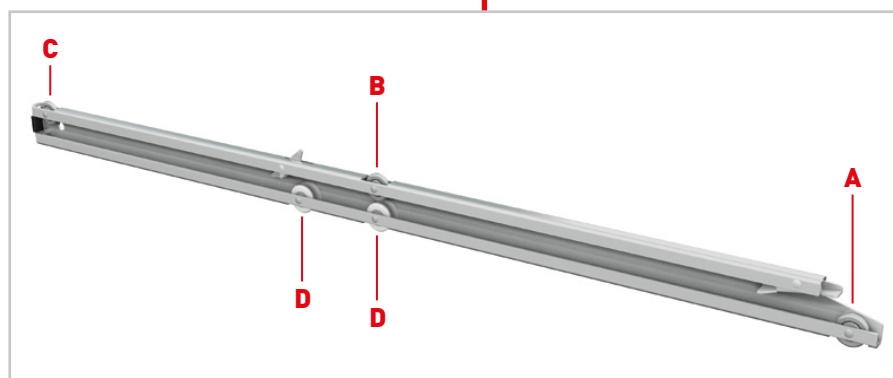

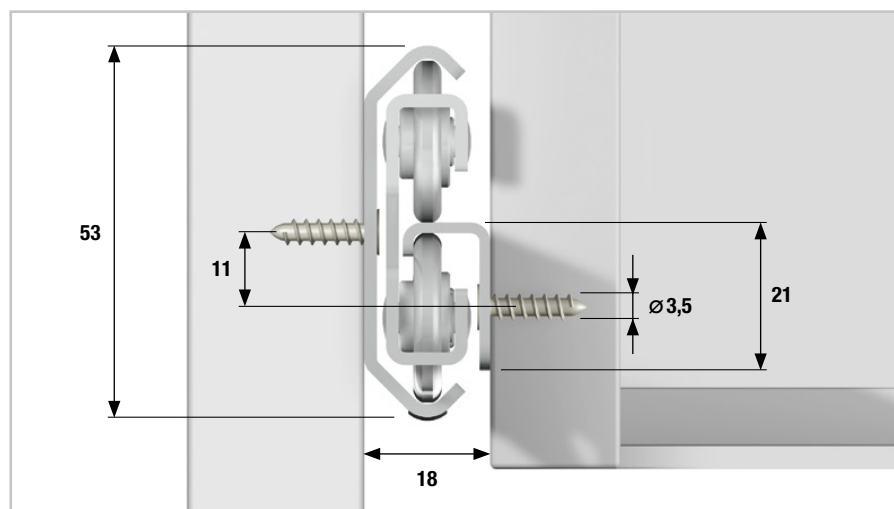391 SPECIFICHE TECNICHE / TECHNICAL SPECIFICATIONS

Profili in acciaio zincato.
Spessore profili 1,80 - 1,80 - 1,50 mm.
Finitura: acciaio zincato.

Profiles made of zinc plated steel.
Profiles thickness 1,80 - 1,80 - 1,50 mm.
Finishing: zinc plated steel.

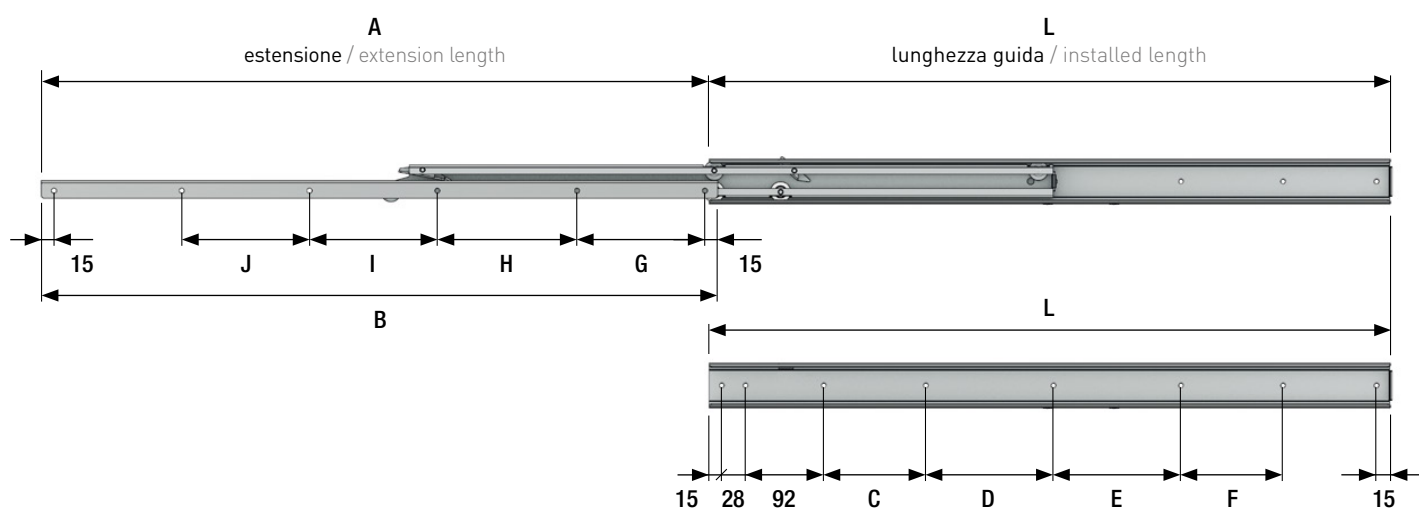**SCHEMA FORATURA** / HOLE PATTERN

Codice XXXX* Code XXXX*	L mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	 Imballo Packing
0030	300	285	294	—	—	—	—	125	—	—	—	8 coppie/pairs
0035	350	335	344	90	—	—	—	150	—	—	—	8 coppie/pairs
0040	400	385	394	140	—	—	—	125	114	—	—	8 coppie/pairs
0045	450	435	444	70	120	—	—	125	139	—	—	8 coppie/pairs
0050	500	485	494	120	120	—	—	150	164	—	—	8 coppie/pairs
0055	550	535	544	120	150	—	—	125	139	125	—	8 coppie/pairs
0060	600	585	594	120	100	120	—	125	139	150	—	8 coppie/pairs
0065	650	635	644	120	150	120	—	150	164	150	—	8 coppie/pairs
0070	700	685	694	120	150	170	—	125	114	125	150	8 coppie/pairs
0075	750	735	744	120	150	100	120	150	139	125	150	8 coppie/pairs
0080	800	785	794	120	150	150	120	150	164	150	150	8 coppie/pairs

*Codice / Ordering Code: **00391/000/00/XXXX/00**