

# SUN

## LED 350mA - 3,5W


**IT** Faretto da incasso - Realizzato in metallo con schermo in policarbonato.

**EN** Recessed spotlight - Metal structure and screen in polycarbonate.

**DE** Einbaustrahler - Metall-Gehäuse und Polykarbonat- Abdeckung.


118-140 lm/W PHOTOBIOLOGICAL CLASS 0 CRI=85

CE ENEC IP20 PATENTED

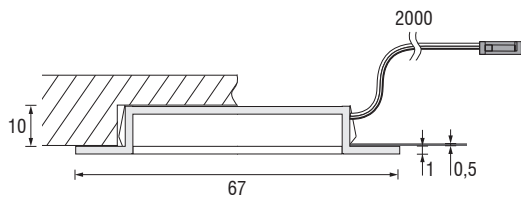


**A** Installazione su legno  
Fitting - Wooden Surfaces  
Montage - Holz

**B** Installazione su lamiera  
Fitting - Metal Surfaces  
Montage - Metall

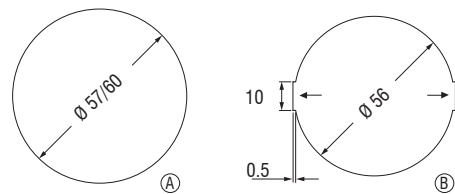

Foro di incasso / Recessed hole / Einbaumaße

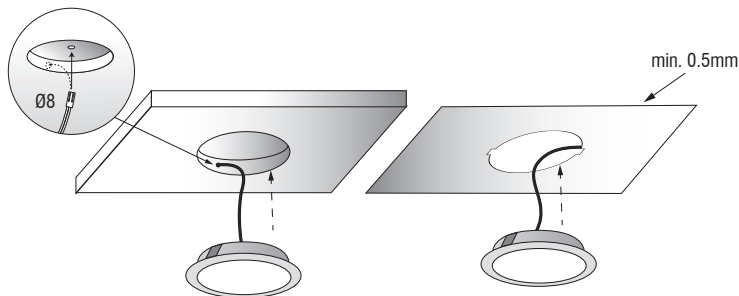

Finitura Finish - Ausführung	3000 K		4000 K		Imballo - Packaging - Verpackung		
	Codice - Part no. - Artikel-Nr.	EEC	Codice - Part no. - Artikel-Nr.	EEC	Pcs	Kg	mm
Acciaio / Steel / Edelstahl	1730020A	A++	1730120A	A++	1	0,075	25 x 75 x 100
Alluminio / Aluminium / Aluminium	1730020S	A++	1730120A	A++	1	0,075	25 x 75 x 100
Cromo / Chrome / Chrom	1730020C	A++	1730120A	A++	1	0,075	25 x 75 x 100
Bronzo / Bronze / Bronze	1730020L	A++	1730120A	A++	1	0,075	25 x 75 x 100
Oro / Gold / Gold	17300200	A++	1730120A	A++	1	0,075	25 x 75 x 100
Bianco / White / Weiß	1730020B	A++	1730120A	A++	1	0,075	25 x 75 x 100
Nero / Black / Schwarz	1730020N	A++	1730120A	A++	1	0,075	25 x 75 x 100

SUN LED 350mA - 3,5W		LUX
mm	Beam Angle	3000K 4000K
250	108°	1500 1600
500	∅ 2000	380 410
750	∅ 3100	180 170
1000	∅ 4100	100 100

Dimensioni in millimetri (mm) / Dimensions in Millimeters (mm) / Dimensionen in Millimetern (mm)  
Alimentatore non incluso / Driver not included / LED-Konverter nicht inbegriffen

Connettore  
Connector / Verbindungsstecker

