

# ORIZZONTE CU

con interruttore - WITH SWITCH – mit Schalter

Barra appendi-oggetti fluorescente in alluminio satinato e schermo in polycarbonato trasparente, da installare sotto i pensili da cucina per illuminare il piano di lavoro.

FLUORESCENT HOLDER RAIL IN ALUMINUM AND POLYCARBONATE SCREEN TO BE INSTALLED UNDER KITCHEN CUPBOARDS TO LIGHT UP THE KITCHEN WORKTOP.

Leuchtstofflampe mit Aluminiumstruktur und Lampenabdeckung aus Polycarbonat. Zur Montage unter dem Küchenschrank zur Beleuchtung der Arbeitsfläche inkl. Küchenzubehörträger.





## DATI TECNICI

## TECHNICAL DATA

## TECHNISCHE ANFORDERUNGEN

DATI TECNICI	TECHNICAL DATA	TECHNISCHE ANFORDERUNGEN			
Sorgente luminosa	LIGHT SOURCE	Lichtquelle	Lampada fluorescente T5 Ø 16mm	FLUORESCENT BULB T5 Ø 16MM	Alu-Leuchte T5 Ø 16mm
Temperatura colore(K)	COLOR TEMPERATURE(K)	Lichtfarbe(K)	4000K 3000 (a richiesta)	4000K 3000K (UPON REQUEST)	4000K 3000k (auf Anfrage)
Tensione	VOLTAGE	Voltzahl	220-230V 110V (a richiesta)	220-230V 110V (UPON REQUEST)	220-230V 110V (auf Anfrage)
Lunghezza cavo	CABLE LENGTH	Kabellänge	3000 mm (con spina)	3000 MM (WITH PLUG)	3000 mm (mit Stecker)
Accensione	SWITCHING SYSTEM	Schaltsystem	con interruttore	WITH SWITCH	mit Schalter

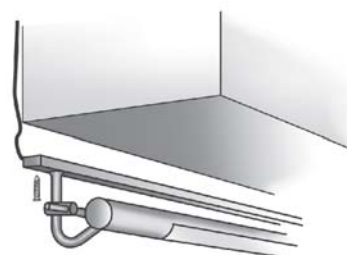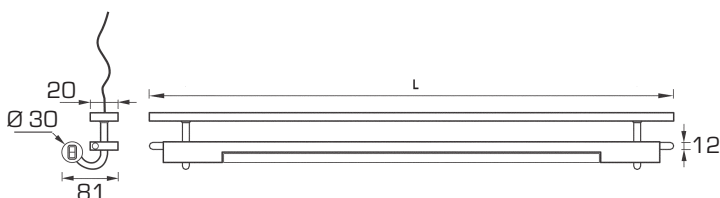

Dimensioni in millimetri (mm)  
DIMENSIONS IN MILLIMETERS (MM)  
Dimensionen in Millimetern (mm)

Finitura FINISH - Ausführung	Codice - PART No. - Artikel-Nr.			
	L = 450 W = 6	L = 600 W = 8	L = 900 W = 13	L = 1200 W = 21
Alluminio ossidato OXIDISED ALUMINIUM Aluminium	13520S	13525S	13530S	13535S