







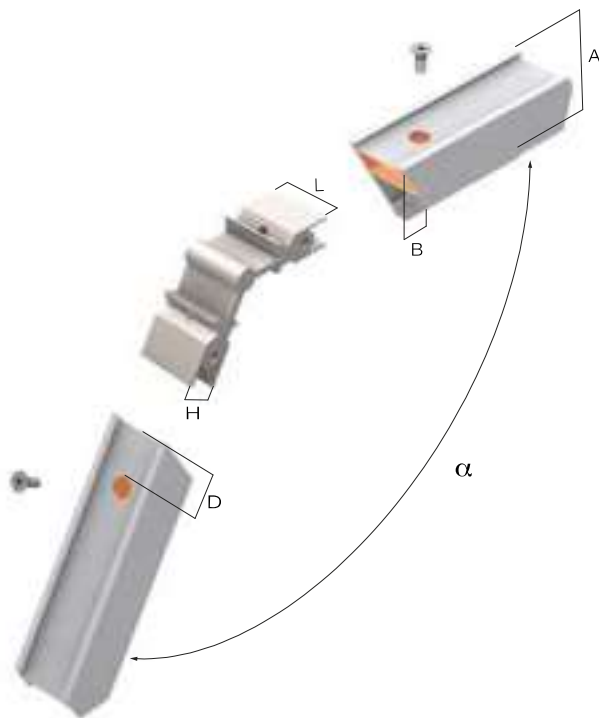

09 Squadrette ad angolo variabile in alluminio estruso

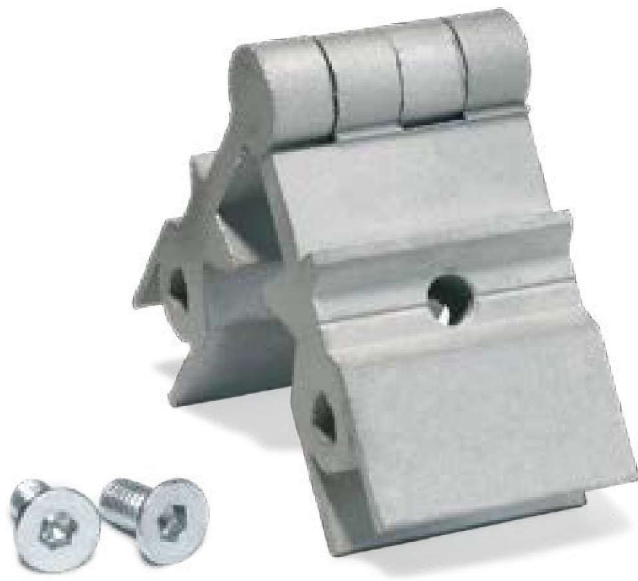

Codice	Articolo	L mm	H mm	α	D mm	Pcs/pack	Kg/pack
12256505	1550	41	10,5	45°-315°	25+(7xB÷A)	50	3,2
12257005	1551	28,4	14	55°-315°	25+(7xB÷A)	50	2,7
12257505	1552	33,5	35,8	60°-330°	25+(7xB÷A)	20	1,8
12258005	1553	36	14	55°-315°	25+(7xB÷A)	50	3,5
12258505	1554	23,2	14	55°-315°	25+(7xB÷A)	50	2
12259005	1555	24	14	55°-315°	25+(7xB÷A)	50	2,4
12259505	1556 	36	10,4	45°-315°	25+(7xB÷A)	50	7,3
12260005	1557	28,4	34,5	60°-330°	25+(7xB÷A)	20	1,5
12260505	1558	28,4	14	55°-315°	25+(7xB÷A)	50	2,95
12261005	1559	22,8	35,5	60°-330°	25+(7xB÷A)	20	1,34
12261505	1560 	32	10,4	45°-270°	25+(7xB÷A)	50	3,1
12262005	1561 	32,8	14	55°-270°	25+(7xB÷A)	50	2,9
12262505	1562 	45,5	14	55°-270°	25+(7xB÷A)	50	3,2
12262510	1563 	40	26	60°-330°	25+(7xB÷A)	20	1,74
12260101	1564	27	31,5	60°-330°	25+(7xB÷A)	20	1,58
12260201	1565 	20,4	34,8	60°-330°	25+(7xB÷A)	20	1,22
12260301	1566	21,5	10,5	55°-315°	25+(7xB÷A)	50	2
12260401	1567	21,8	14	55°-315°	25+(7xB÷A)	50	2
12260402	1568	21,8	35,8	60°-330°	25+(7xB÷A)	20	1,3

Finitura: Burattatura e sabbatura