



## Builder's Hardware for aluminium windows and patio doors




Tilt-turn and  
side hung fittings

Turn handles




Parallel slide and  
tilt fittings

Slide-fold fittings





Lift-slide fittings

Horizontal and vertical  
pivot fittings

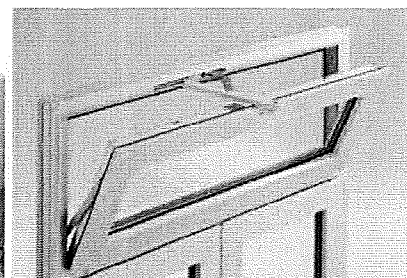

Fan-light openers


Ventilators for windows

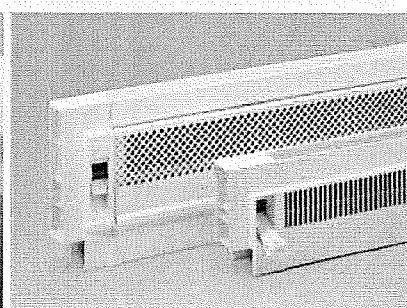

# Locking mechanism JET AK 8 – First tilt fittings – 1 and 2 sashes



Windows and patio doors with geared handle



Additional stay arm  
G-46145-00-0-1

Stay arm FT  
Size 30, 50, 90

Locking plate  
6-30959-\*\*-0-1

Corner transmission  
6-30889-\*\*-0-1

Corner transmission  
6-24529-00-0-1  
Locking plate  
6-30959-\*\*-0-1

## Fitting requirements according to size of sashes for schemes A to E

Quantity					Description	PU	Article No.
A	B	C	D	E			
1	1	1	1	1	<b>Geared handle SPACIO FT [1]</b> hole centre distance 104 mm, lockable – incl. screws	10	G-46557-96-L-*
						10	G-46557-96-R-*
1	1	1	1	1	<b>Wrong operation safety device (WOSD)</b> 100 hole centre distance 104 mm		6-31065-40-0-1
					<b>Box of stay arm JET AK 8 FT</b>		
					SW Size		
1	1				355- 700 30	10	K-16671-00-0-1
1	1				701-1000 50	10	K-16672-00-0-1
1	1	1	1		1001-1400 90	10	K-16673-00-0-1
			1		1401-1700 50	10	K-16672-00-0-1
			1		1401-1700 Additional stay arm	10	G-46145-00-0-1
1	1	1	1	1	<b>Bag of locking parts JET AK 8 FT</b> for geared handle	10	K-17057-00-0-1
					<b>Contents</b>		
					1 Corner transmission		6-24529-00-0-1
					1 Carrier		6-30984-00-0-1
					1 Shoot bolt FT, bottom		G-17648-00-0-1
					1 Tilt locking plate FT		6-32287-00-0-1
					1 Wedge for frame		6-30998-00-0-1
					1 Wedge for sash		9-40404-00-0-1
1	1	2	2		<b>Bag of middle lock [2]</b>	10	K-15808-00-0-1
					<b>Contents</b>		
					1 Corner transmission [3]		6-30889-00-0-1
					1 Locking pin element		6-24539-00-0-1
					alternatively for deepened rod groove		
					<b>Bag of middle lock [2]</b>	10	K-15809-00-0-1
					<b>Contents</b>		
					1 Corner transmission [4]		6-30889-01-0-1
					1 Locking pin element		6-24539-00-0-1
1	3	3	5	5	<b>Locking plate</b>	100	6-30959-00-0-1
					alternatively for + 0,7 mm gasket pressure		
					<b>Locking plate</b>	100	6-30959-01-0-1

[1] \* = Colour: 0 = uncoated, 1 = F 1/EV 1, 5 = UC 5, 6 = black (RAL 9005),  
7 = white (RAL 9016), 7T = white (RAL 9010)

[2] Middle lock from SW or SH 1200 mm

[3] Groove depth max. 3,9 mm or groove width max. 13 mm

[4] Groove depth 4,0 to 5,1 mm

Working drawing 0-44529

Geared handle SPACIO FT  
G-46557-96-\*\*-  
WOSD  
6-31065-40-0-1

Tilt locking plate FT  
6-32287-00-0-1  
Shoot bolt FT, bottom  
G-17648-00-0-1  
Corner transmission  
6-30889-\*\*-0-1

Wedge for frame  
6-30998-00-0-1

Wedge for sash  
9-40404-00-0-1

Locking pin element  
6-24539-00-0-1  
Locking plate  
6-30959-\*\*-0-1