


Bandelle dritte

ART. 1206 Ø 10
ART. 1226 Ø 12
ART. 1246 Ø 14
ART. 1266 Ø 18

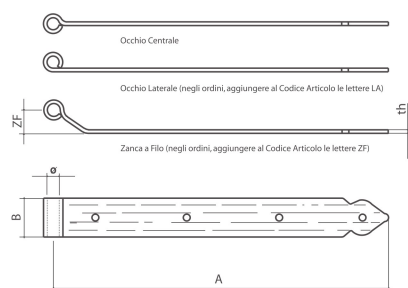


bandelle dritte e zanca a filo
straight, 45° bent hinge
gerades band mit bündiger kröpfung
penture droite et coudée à 45°

Articolo	A	B	ZF	th	Ø	Pz./Conf.
1206	200	35	20.5	3	10	24
1206	250	35	20.5	3	10	24
1206	300	35	20.5	3	10	24
1206	350	35	20.5	3	10	24
1226	200	35	22.5	3.5	12	24
1226	250	35	22.5	3.5	12	24
1226	300	35	22.5	3.5	12	24
1226	350	35	22.5	3.5	12	24

Articolo	A	B	ZF	th	Ø	Pz./Conf.
1226	400	40	22.5	4	12	12
1226	450	40	22.5	4	12	12
1226	500	40	22.5	4	12	12
1246	400	40	*	5	14	12
1246	500	40	*	5	14	12
1246	600	40	*	5	14	12
1266	800	50	*	6	18	4
1266	1000	50	*	6	18	4

ART. 1206/z Ø 10
ART. 1226/z Ø 12


Z = zanca
ZC = zanca corta
ZM = zanca media
ZL = zanca lunga

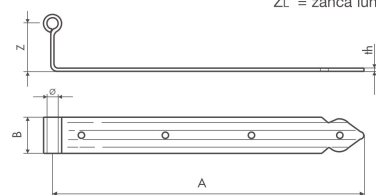

bandelle zancate
90° bent hinge
band, gekröpft
penture coudée à 90°

Articolo	A	B	th	Ø	ZC	ZM	ZL	Pz./Conf.
1206/Z	250	35	3	10	35	45	60	24
1206/Z	300	35	3	10	35	45	60	24
1226/Z	250	35	3.5	12	35	45	60	24
1226/Z	300	35	3.5	12	35	45	60	24
1226/Z	350	40	4	12	35	45	60	12
1226/Z	400	40	4	12	35	45	60	12
1226/Z	450	40	4	12	35	45	60	12
1226/Z	550	40	4	12	35	45	60	12

ART. 1224 Ø 12

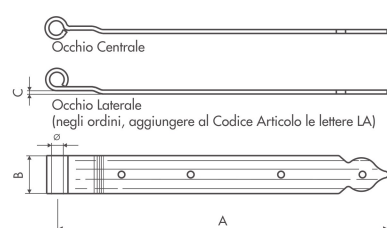

bandelle dritte con sbalzo
straight hinge with embossment
gerades band mit stufe
penture droite avec relief

Articolo	A	B	C	Ø	th	Pz./Conf.
1224	200	35	3-6	12	3.5	24
1224	250	35	3-6	12	3.5	24
1224	300	35	3-6	12	3.5	24
1224	350	35	3-6	12	3.5	24