


Häfele Loox Multi-white control 24 V

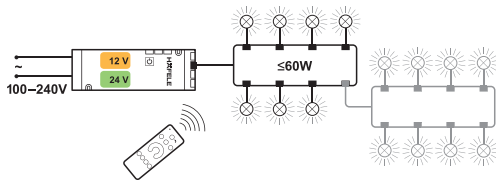

Note

Max. 10 colour mixers can be freely combined with 1–10 remote controls within a range of 15 m per installation
The lights are connected to the multi-white mixer with multi-white leads.
The lead of the multi-white mixer can be extended with standard Loox leads.

→ Multi-white mixer



- > Area of application: For Häfele Loox multi-white lights
- > Version: With 8-way distributor
- > Dim.: Colour mixer 96 x 44 x 16 mm
8-way distributor 83 x 32 x 14 mm
- > Radio frequency: 2.4 GHz

Supplied with

1 multi-white mixer with 2 m lead
1 8-way distributor with 0.3 m lead

	Current carrying capacity A	Wattage W	Cat. No.
24 V	2.5	Max. 60	833.77.787

Packing: 1 piece

→ Multi-white radio remote control



- > Area of application: For multi-white mixers 12/24 V
- > Version: With replaceable CR2032 button cell lithium battery
- > Dim.: 127 x 48 x 10 mm

Supplied with

1 radio remote control
1 CR2032 button cell lithium battery

	Cat. No.
Remote control, for multi-white mixer 12/24 V, with replaceable CR2032 button cell lithium battery	833.77.786

Packing: 1 piece

→ 8-way distributor



- > Area of application: For multi-white mixers 12/24 V
- > Dim.: 83 x 32 x 14 mm

Supplied with

1 8-way distributor with 0.3 m lead

Note

Lead cannot be extended.

	Cat. No.
Multi-white 8-way distributor	833.77.721

Packing: 1 piece

Drivers ▶ FF 2.102

Extension leads for mixer lead ▶ FF 2.109