

LIWIN L35 RADIO

- Collegamento senza centralina | *Without control unit*
- SOFT START & STOP
- Rilevamento ostacoli | *Obstacle detection*
- Fine corsa per assorbimento | *Stroke limit - resistance*

- Velocità | *Speed* **18 mm/sec**
- Forza di spinta | *Thrust force* **350 N**
- Servizio | *Type of service* **S2 - 4 min**
- Temp min-max **-5°C / +50°C**







IP44







Apertura Vasistas

Bottom hung inward opening window

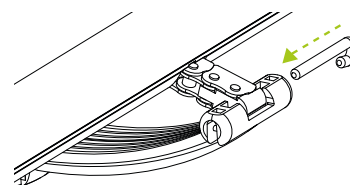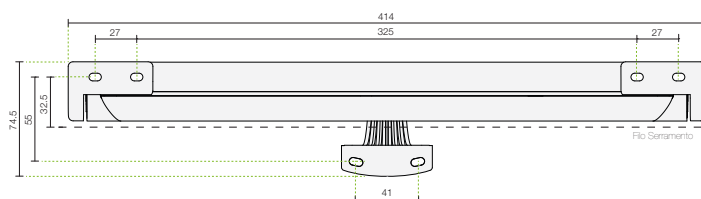

Apertura a sporgere

Top hung outward opening window

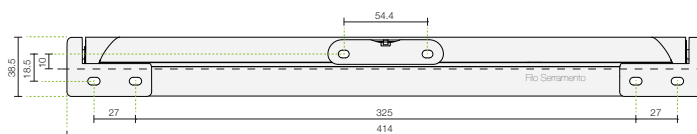

LIWIN L35 RADIO

Article	Product code	Colour	Strokes	Push pull	Power	230 Vac	Weight	Pieces
L35 230V R	ML35 R1 40H 0B 00	■ Black RAL 9005	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	1,23 Kg	1
L35 230V R	ML35 R1 40H 0G 00	■ Grey RAL 7035	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	1,23 Kg	1
L35 230V R	ML35 R1 40H 0W 00	□ White RAL 9010	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	1,23 Kg	1

Alimentazione
Power supply



Radiocomando non incluso
Remote control not included



L < 125 cm
Base / Length

Fino a **6** canali
Up to channels

LIWIN L35 RADIO 2W-NET

Article	Product code	Colour	Strokes	Push pull	Power	230 Vac	Weight	Pieces
L35 230V R 2W-NET	ML35 R2 40H 0B 00	■ Black RAL 9005	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	2,46 Kg	2
L35 230V R 2W-NET	ML35 R2 40H 0G 00	■ Grey RAL 7035	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	2,46 Kg	2
L35 230V R 2W-NET	ML35 R2 40H 0W 00	□ White RAL 9010	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	2,46 Kg	2



Alimentazione
Power supply



Radiocomando non incluso
Remote control not included



L 125 < 250 cm
Base / Length

Fino a **6** canali
Up to channels

LIWIN L35 RADIO 3W-NET

Article	Product code	Colour	Strokes	Push pull	Power	230 Vac	Weight	Pieces
L35 230V R 3W-NET	ML35 R3 40H 0B 00	■ Black RAL 9005	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	3,68 Kg	3
L35 230V R 3W-NET	ML35 R3 40H 0G 00	■ Grey RAL 7035	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	3,68 Kg	3
L35 230V R 3W-NET	ML35 R3 40H 0W 00	□ White RAL 9010	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	3,68 Kg	3



Alimentazione
Power supply



Radiocomando non incluso
Remote control not included



L 250 < 375 cm
Base / Length

Fino a **6** canali
Up to channels

LIWIN L35 RADIO 4W-NET

Article	Product code	Colour	Strokes	Push pull	Power	230 Vac	Weight	Pieces
L35 230V R 4W-NET	ML35 R4 40H 0B 00	■ Black RAL 9005	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	4,90 Kg	4
L35 230V R 4W-NET	ML35 R4 40H 0G 00	■ Grey RAL 7035	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	4,90 Kg	4
L35 230V R 4W-NET	ML35 R4 40H 0W 00	□ White RAL 9010	50-100-150-200-250-300-350-400-420	350 N	28W	0,19 A	4,90 Kg	4



Alimentazione
Power supply



Radiocomando non incluso
Remote control not included



L 375 < 500 cm
Base / Length

Fino a **6** canali
Up to channels